

# EROAD Asset Tracker

## Installation Instructions




help.eroad.com/nz 0800 437 623  
© 2016 EROAD. Doc 109200AD1.3. 11/2016

The Asset Tracker is designed for installation on an asset that resides mostly outside.

### MOUNT THE ASSET TRACKER ON THE ASSET

- 1 Choose the mounting location.
  - good, unobstructed view of the sky
  - **don't block doors or movable parts**
  - smooth surface for best adhesion
- 2 Clear mounting location of any debris and thoroughly clean with alcohol wipes.
- 3 Apply pre-cut **tape (A)** to **mounting bracket (B)**, remove lining and attach to clean, dry location.

**HELPFUL HINT:** Before applying the tape, lift a piece of the lining for easy peeling (C).

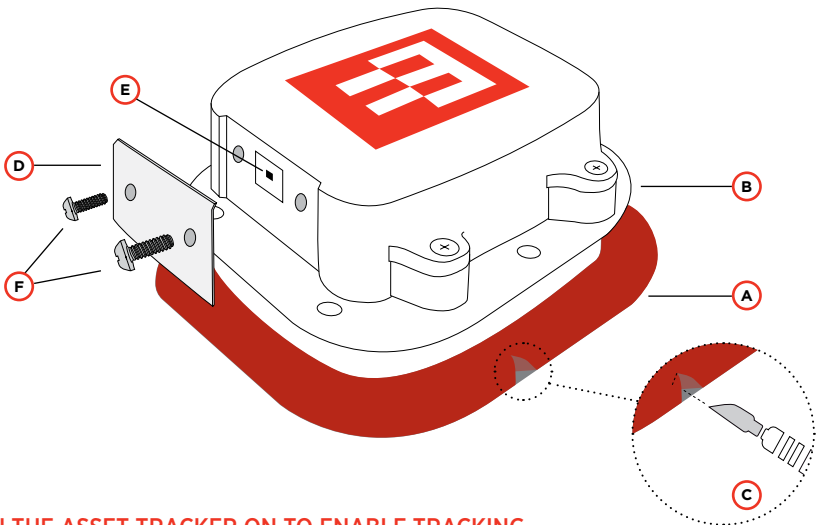

### TURN THE ASSET TRACKER ON TO ENABLE TRACKING

- 4 Remove the **connector cover (D)**, put the **switch (E)** into ON position.
- 5 Replace the connector cover and secure with **screws (F)**

**NOTE:** When moving the Asset Tracker to another asset, we recommend that you secure it to its new location using 3M VHB Heavy Duty Mounting Tape.

# EROAD Asset Tracker - Installation Instructions

## REPLACE BATTERIES

The Asset Tracker is powered by and supplied with four installed 1.5V lithium AAA batteries.

**CAUTION:** Risk of explosion of battery if replaced by an incorrect type. Dispose of used batteries according to the manufacturer's instructions.

**NOTE:** The Asset Tracker will retain its configuration when the batteries are replaced.

- 1 Ensure the **switch (E)** is in OFF position.
- 2 Remove the device from the **mounting bracket (B)**.
- 3 Remove the **battery compartment cover (G)** at the bottom of the device.
- 4 Remove used batteries and insert four new **1.5V lithium AAA** batteries.
- 5 Replace the cover and secure with **screws (H)**.
- 6 Turn the Asset Tracker on and secure it to the mounting bracket.

